


SIGNING SCHEDULE

Customer: <u>tree technique</u>	Site: <u>23 Kingston Rd, Shelborne</u>
Number of standard signs: <u>18</u>	Number of special signs: <u>0</u>
Number of operatives: <u>1</u>	Number of vehicles: <u>1</u>

ALL SIGNS ARE TO CARRY SUN TRAFFIC LTD LOGO

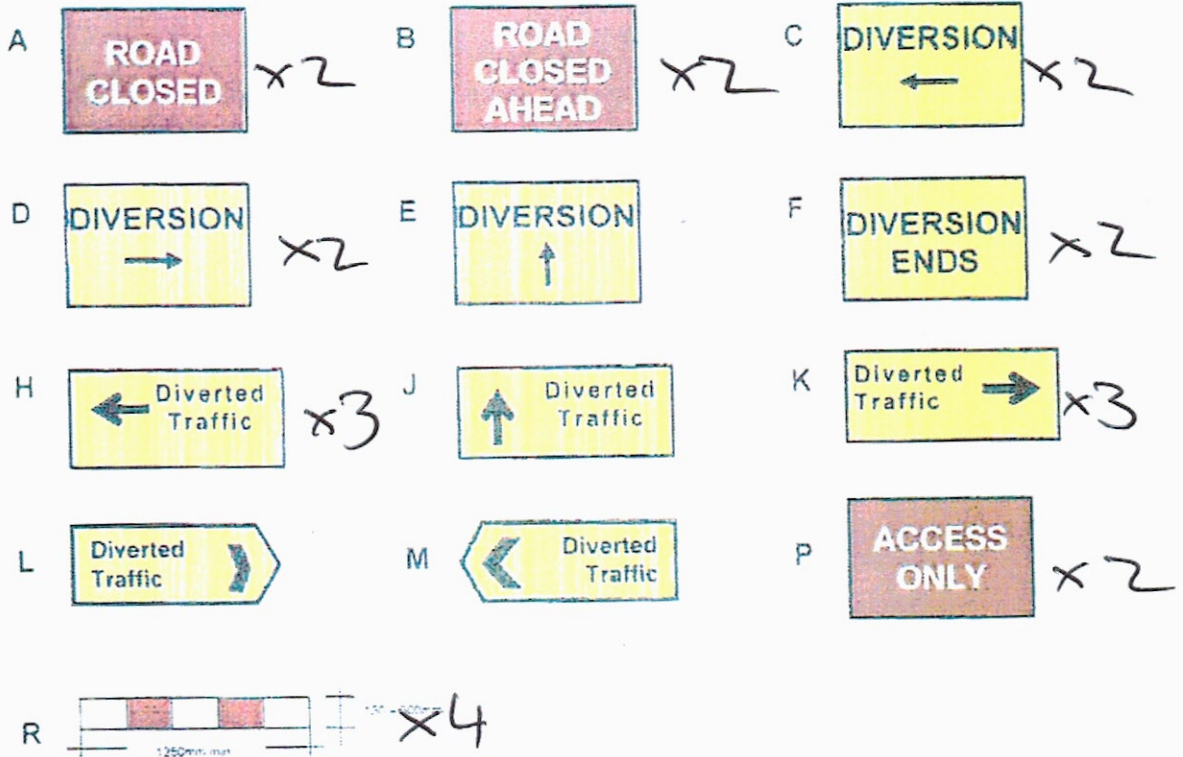

To Extend Full Width Of Carriageway Closure
 Alternate White/Red Bars

Signs C - F to be used at the beginning of closure

Signs A and R (Full width of carriageway) to be placed at limits of closures

All sign positions indicated on plan are approximate. Sizes are applicable to residential roads.

Sizes to be increased on high speed roads.

Signing details shown are MINIMUM requirement. (Excludes Chapter 8 signing). Further signs may be required in response to unforeseen site conditions/circumstances.

The TM operative(s) shall ensure all freestanding temporary signs are made secure by the use of sacks filled with a fine granular material and coned.

Wiltshire, England, United Kingdom

